

1

Align the device keyboard under the bottom case's side clips on both sides.



2

Push the keyboard forward until it is flush with the front edge of the bottom case.




3

Carefully press the rear corner clips to snap onto the keyboard.



4

Align the device screen under the top case's side clips on both sides.

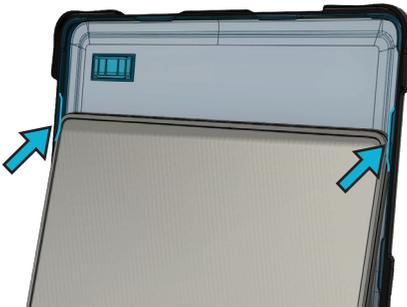

5

Slide the top case down, to secure the screen behind the side clips, until the device reaches the case's top edge.



6

Press the lower side clips over the device, with pressure from both sides, to snap into place securely.



REMOVAL

Gumdrop

CRITICAL!
FOLLOW STEPS 1 AND 2 IN ORDER

Failure to do so may result in damage to the device.



1

Push the lower left and right side clips outward to release the bottom of the top case from the device.



2

Start sliding the top case off by pushing up with your fingers on the bottom corners.



3

Gently push the rear clips down to unhook from the device.



4

Push the left and right side clips down past the device, one side at a time, to release it from the bottom case.



The bottom shell can be recycled if the feet are removed!

